

PES Spray



XA



XAR

Application: Various case (Computer/Mobile), Furniture, Glass, Pressing, Hardware.


MODEL	TYPE OF FEED	NOZZLE ORIFICE	AIR CAP	ATOMIZING AIR PRESSURE		FLUID OUTPUT ml/min	AIR CONSUMPTION	PATTERN WIDTH	Weight g(lbs)
		Ø mm (in)		MPA (BAR / PSI)	l/min (cfm)		mm (in)		
XA-11-08P	PRESSURE	0.8 (0.031)	E2P	0.29 (3.0/43)		150	270 (9.5)	190 (7.5)	410 (0.90)
XA-11-10P		1.0 (0.039)	E2P			200	270 (9.5)	220 (8.7)	
XA-11-13P		1.3 (0.051)	E2P			275	270 (9.5)	265 (10.4)	
XA-11-10P		1.0 (0.039)	E1			100	90 (3.2)	140 (5.5)	
XA-11-13P		1.3 (0.051)	H2			250	260 (9.2)	230 (9.1)	
XA-11-13P		1.3 (0.051)	H4			245	265 (9.4)	270 (10.6)	
XA-11-15P		1.5 (0.059)	H2			270	260 (9.2)	245 (9.6)	
XA-22-12P		1.2 (0.047)	G2P			500	530 (18.7)	400 (15.7)	440 (0.97)
XA-22-15P		1.5 (0.059)	K2			270	330 (11.7)	340 (13.4)	
XA-22-20P		2.0 (0.079)	R2			400	360 (12.7)	320 (12.6)	
XA-22-25P	2.5 (0.098)	W1	500	360 (12.7)	330 (13.0)				
				CAP	FAN				
XA-11-08P	PRESSURE	0.8 (0.031)	E2P	0.26 (2.6/38)	0.22 (2.2/31)	150	270 (9.5)	190 (7.5)	340 (0.75)
XA-22-12P		1.2 (0.047)	G2P	0.24 (2.4/34)	0.26 (2.6/38)	500	530 (18.7)	400 (15.7)	365 (0.80)



AIR AGITATOR FA-8ES

STAINLESS STEEL SHAFT | LxWxH: 410x340x513 (mm)
STAINLESS STEEL BLADE (TSP-3)*1pce | N.W./G.W./MEAS.: 4.4kgs/5.5kgs/1.7cuft

AIR MOTOR	HORSE POWER	AIR CONS.	VIBRATION	R.P.M.	GEAR RATIO	NOISE
AM-08	1/4	16 S.C.F.M.	11m/S ²	2700 rpm	1:1	97 db

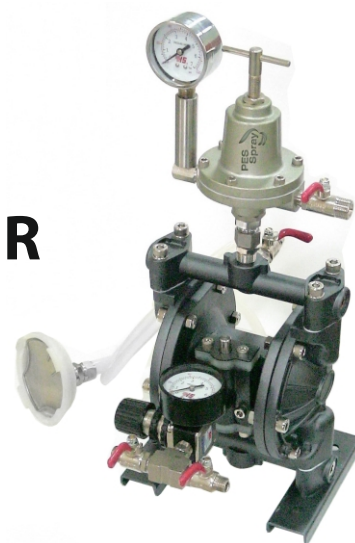

DP-3NR

PRESSURE RATIO : 1:1
TRANSMITTING CAPACITY: 16.5L/Min
USED AIR PRESSURE: 1~5kg/cm
MAX. PAINTING PRESSURE: 5kg/cm

MAX. PUMP SPEED: 160times/min (5kg/cm)
MAX. PUMP SPEED: 80times/min (0.4kg/cm)
MATERIAL: ALUMINIUM

TEFLON HOSES



P-4*6 FEP
P-6*8 FEP

PAINT HOSE



P-4*6

ANTISTATIC PAINT HOSE - CARBON FIBRE



P-6.5*10 CARBON

PES SPRAY TECH PVT. LTD.

736-D , PACE CITY-II , SECTOR 37 , GURGAON , HARYANA – 122002 (INDIA)

TEL: +91 9810354095 , 9910106841

EMAIL : riaz@pesspray.com , aquib@pesspray.com , sales@pesspray.com

www.pesspray.com